



INVISACOOK

The Original



Parts and Pieces that come with the Rail Installation Pack




8 Pieces of 16mm Button Head Socket Cap Screws, Stainless Steel 18-8 (304), Black Finish, for Aluminum Profile of L-Bracket to T-Bar



8 Pieces of T Sliding Nuts Hammer Nut Block Square Nuts M5 T Nuts for Aluminum Profiles of L-Bracket to T-Bar



8 Pieces of Wood Screws 3/4 Inch (20mm), Premium Flat Head Phillips Black Wood Screws, Self Tapping Electrophoresis Used in Indoor Furniture, Woodworking For screwing the L-Bracket into cabinet wall.




2 Pieces of 22" (560mm) Miter T Track



4 Pieces of 11" (280mm) T-Bar with Designated holes for L-Bracket assembly



4 x Corner Bracket 78x78mm for Aluminum Extrusion Profile, 4 Hole Inside Strong Support Corner Brackets

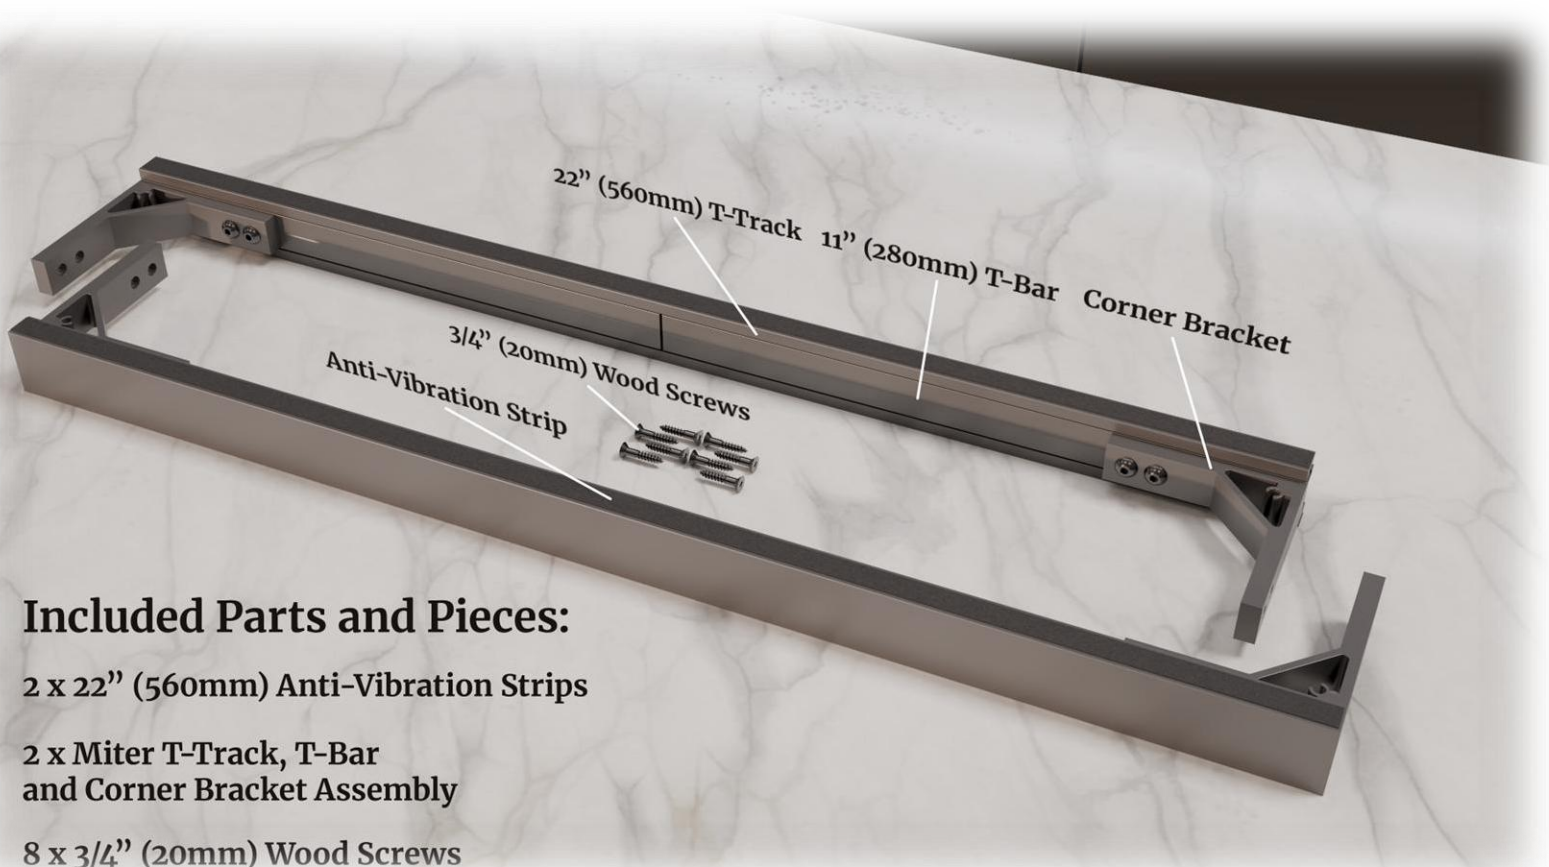

Included Parts and Pieces:

2 x 22" (560mm) Anti-Vibration Strips

2 x Miter T-Track, T-Bar and Corner Bracket Assembly


8 x 3/4" (20mm) Wood Screws

IMPORTANT NOTES FOR PROPER INSTALLATION BY GUIDANCE OF PORCELAIN MANUFACTURES

- Burners are to be a **minimum of 25cm or 10" Inches** away from any open ends or Edges of the Countertop Material.

****See diagram below****


- All corners are to be round edges as instructed by the Materials Specification for the Porcelain fabricated slabs.

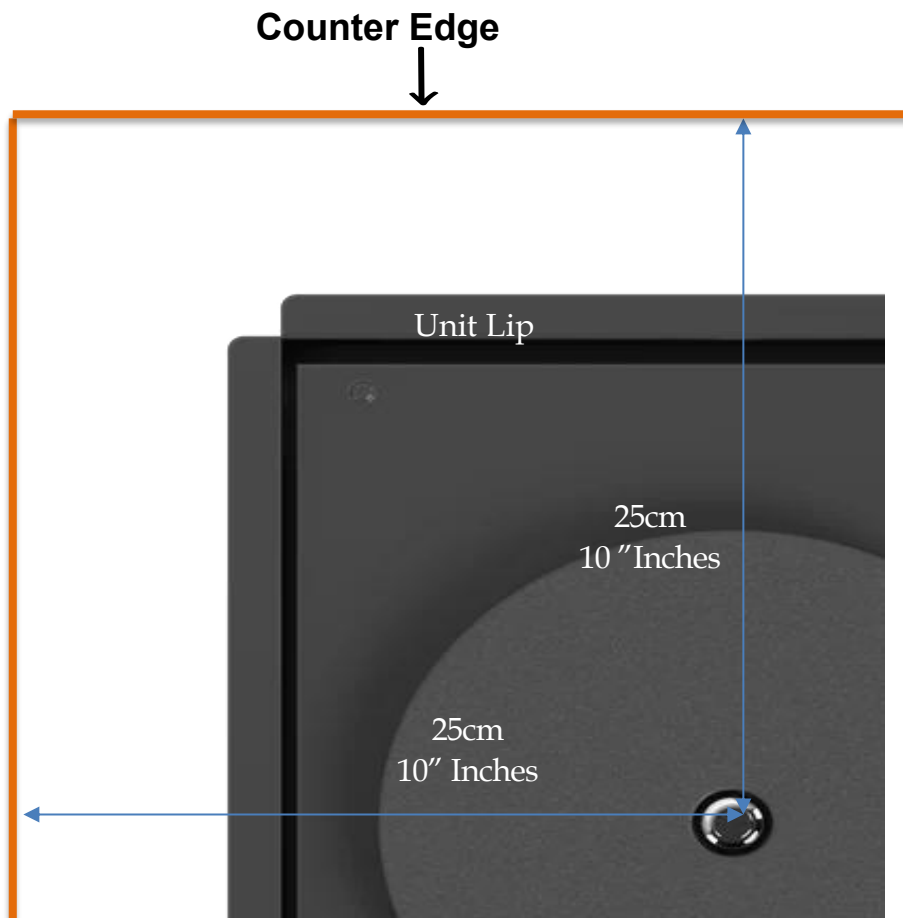

Minimum Dimensions to Counter Edge

Measurements to front of unit, for Back and Sides, make sure to see next pages, with countertop depth and width minimum requirements.

Invisacook can only be used with a minimum countertop thickness of 12mm (1.2cm) (1/2") and Max thickness of 20mm (2cm) (3/4") Countertops from tested and approved brands

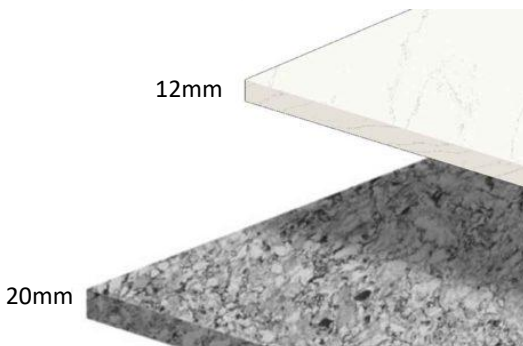



5 Burner 220V


8150-256-001B



5 Burner Framed in Installation of Rail for Island Use Only

25cm must be met from center to
Burners to any countertop edge

Min Countertop Depth
is 29" (73.5cm)

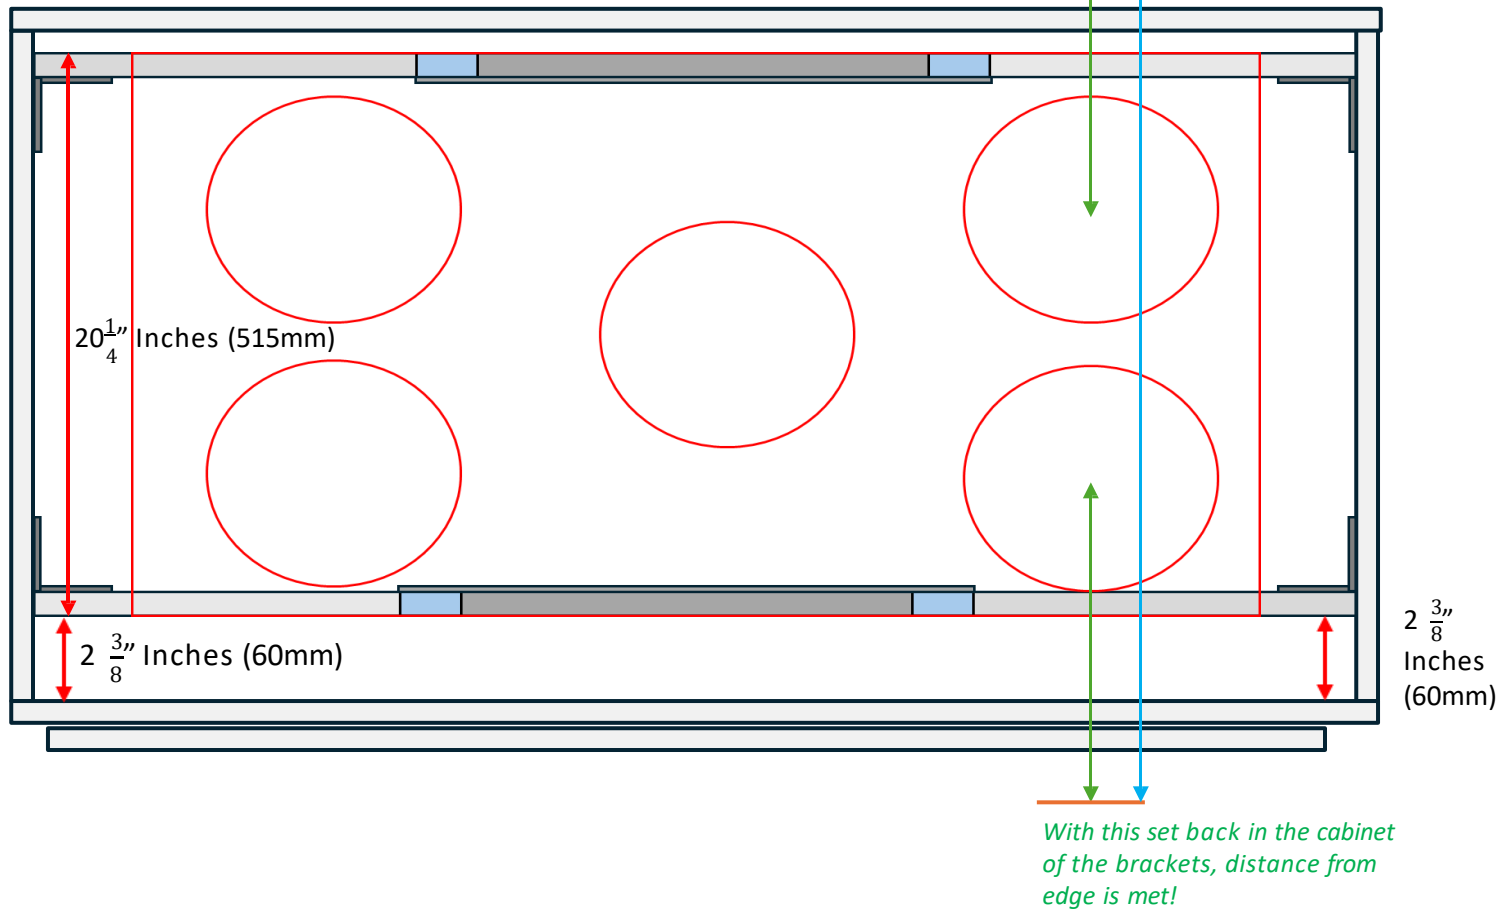




4 Burner Squared 220V

8140-257-001B



4 Burner Framed in Installation of Rail for Island Installation Only

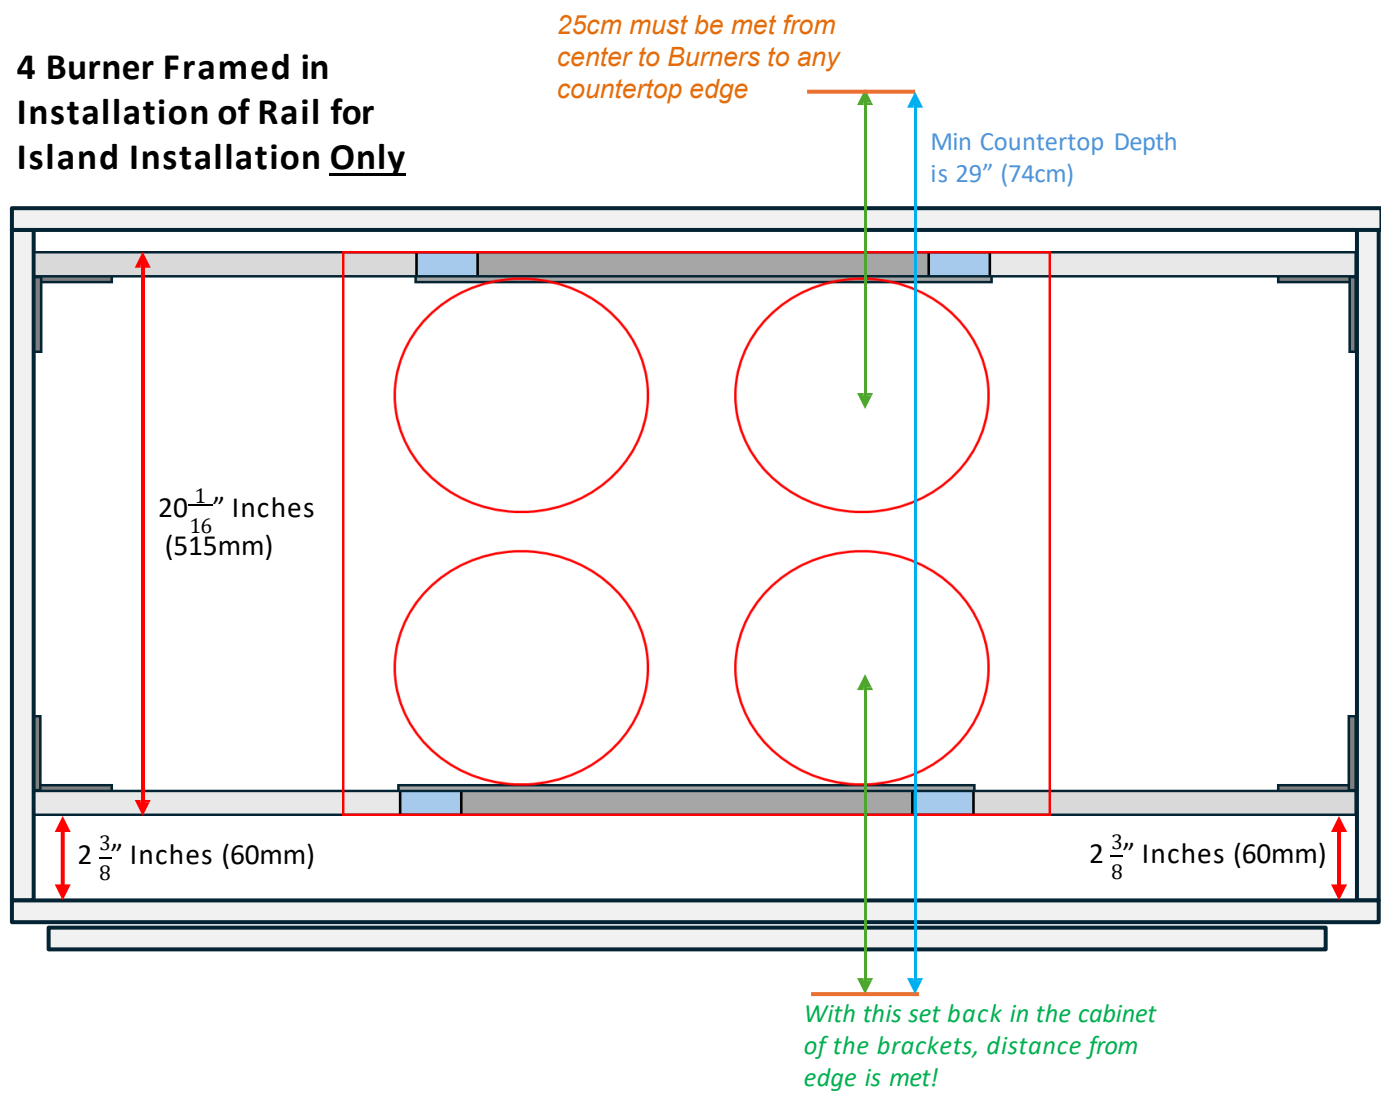




4 Burner Straight Row 220V

8145-257-001BSR



4 Burner Straight Row, Framed in Installation of Rail in Galley Kitchen Use or Island

25cm must be met from
center to Burners to any
countertop edge

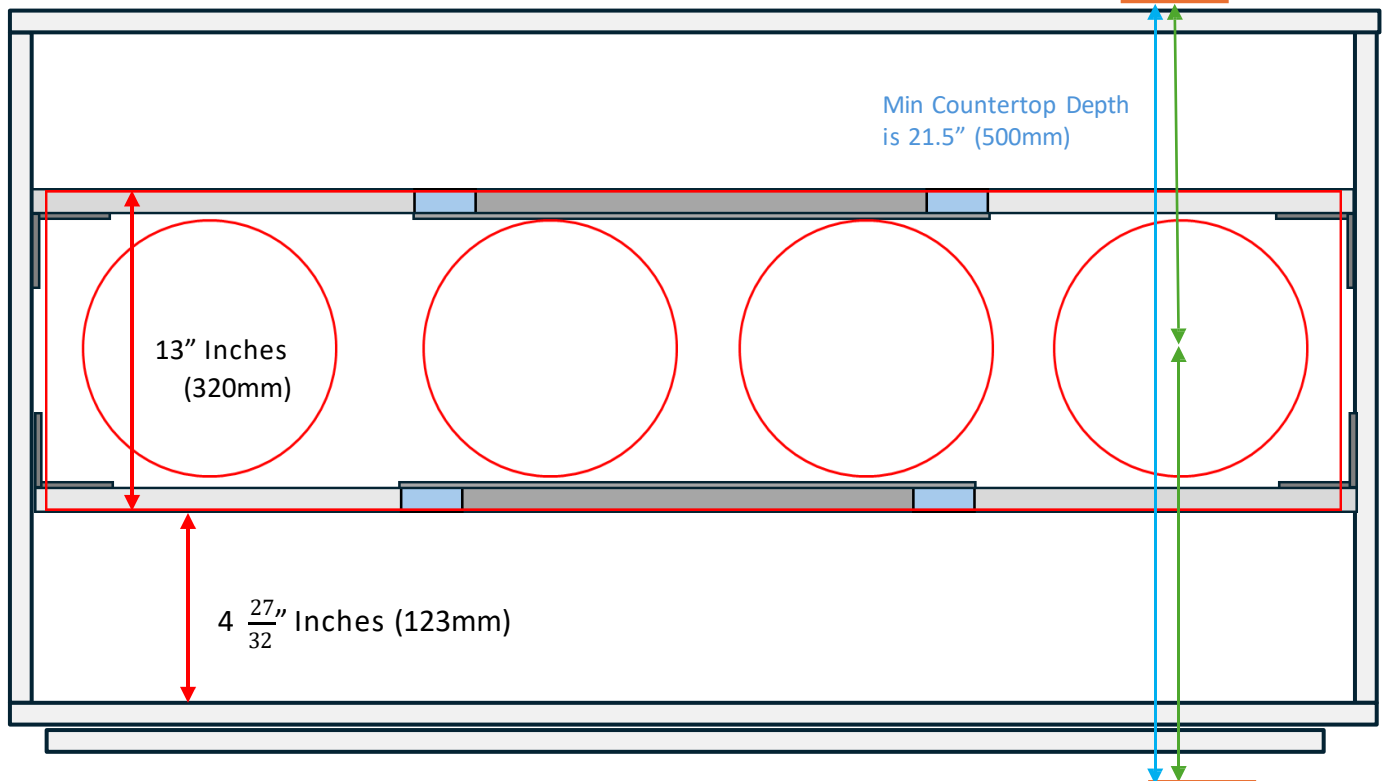

With this set back in the cabinet
of the brackets, distance from
edge is met!






3 Burner 220V

8134-256-001B



**3 Burner Framed in
Installation of Rail
in a Galley Kitchen**

*25cm (10 inches) must be met
from center to Burners to any
countertop edge*

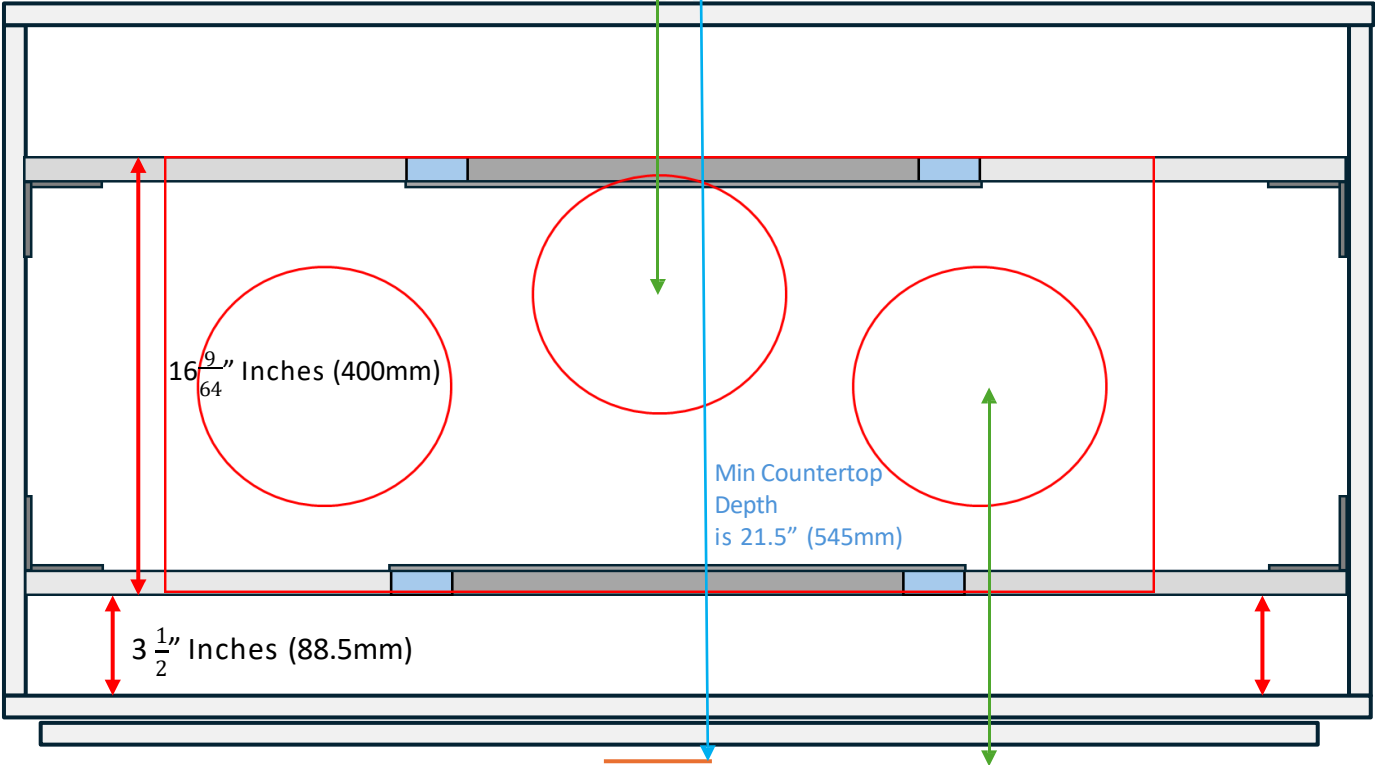




2 Burner 110V or 220V


8121-257-001B



**2 Burner Framed in
Installation for Rail in
Island Use Only**

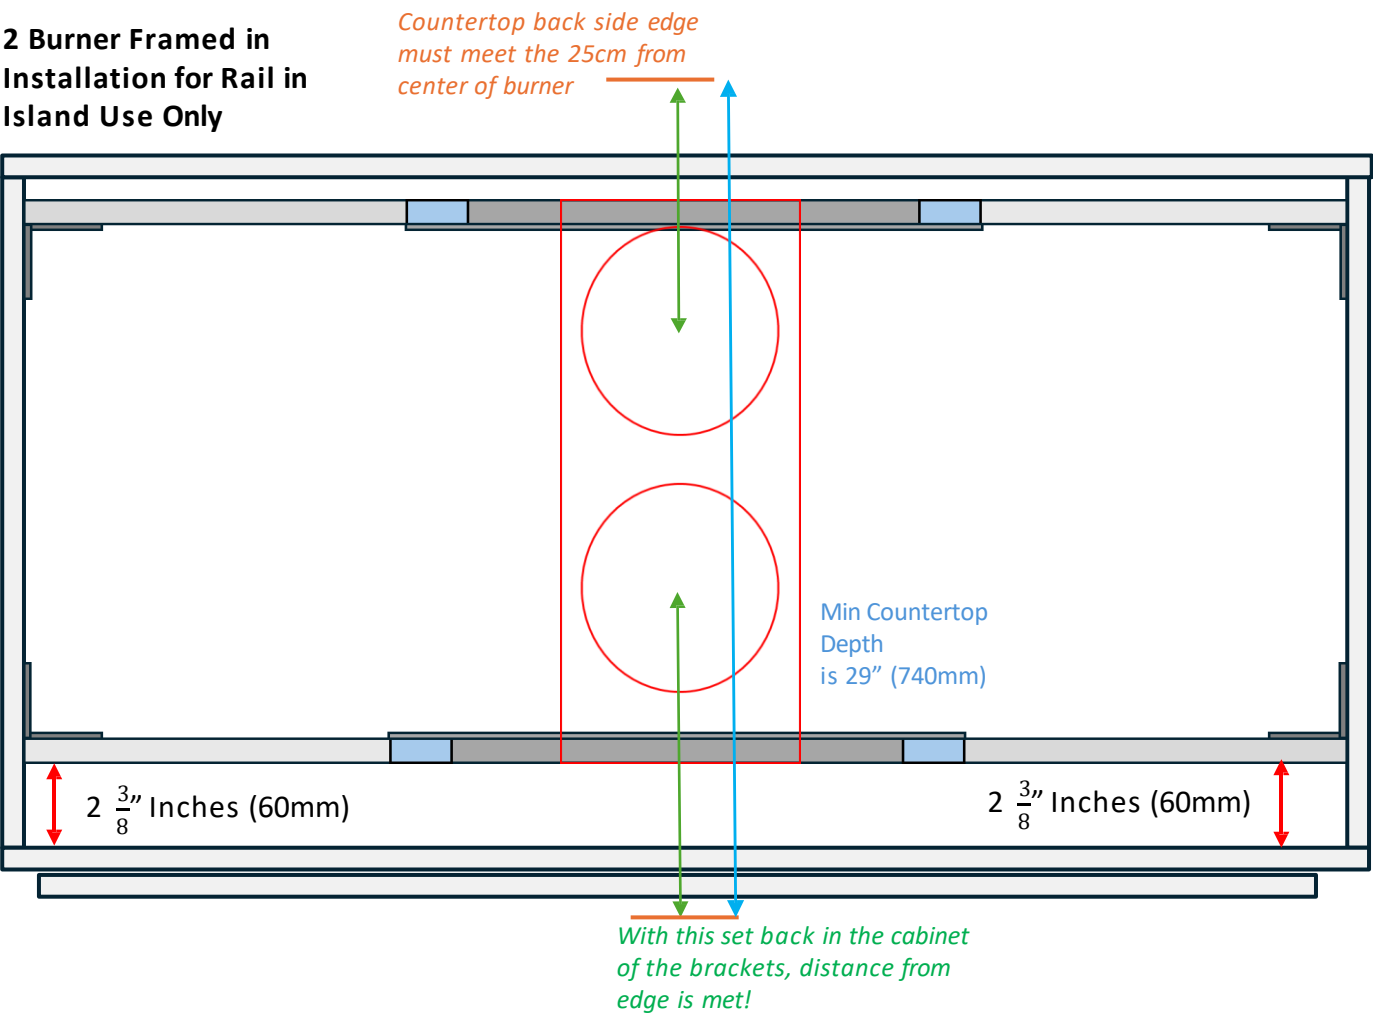

**2 Burner Framed in
Installation of Rail System
for Galley Kitchen Use**

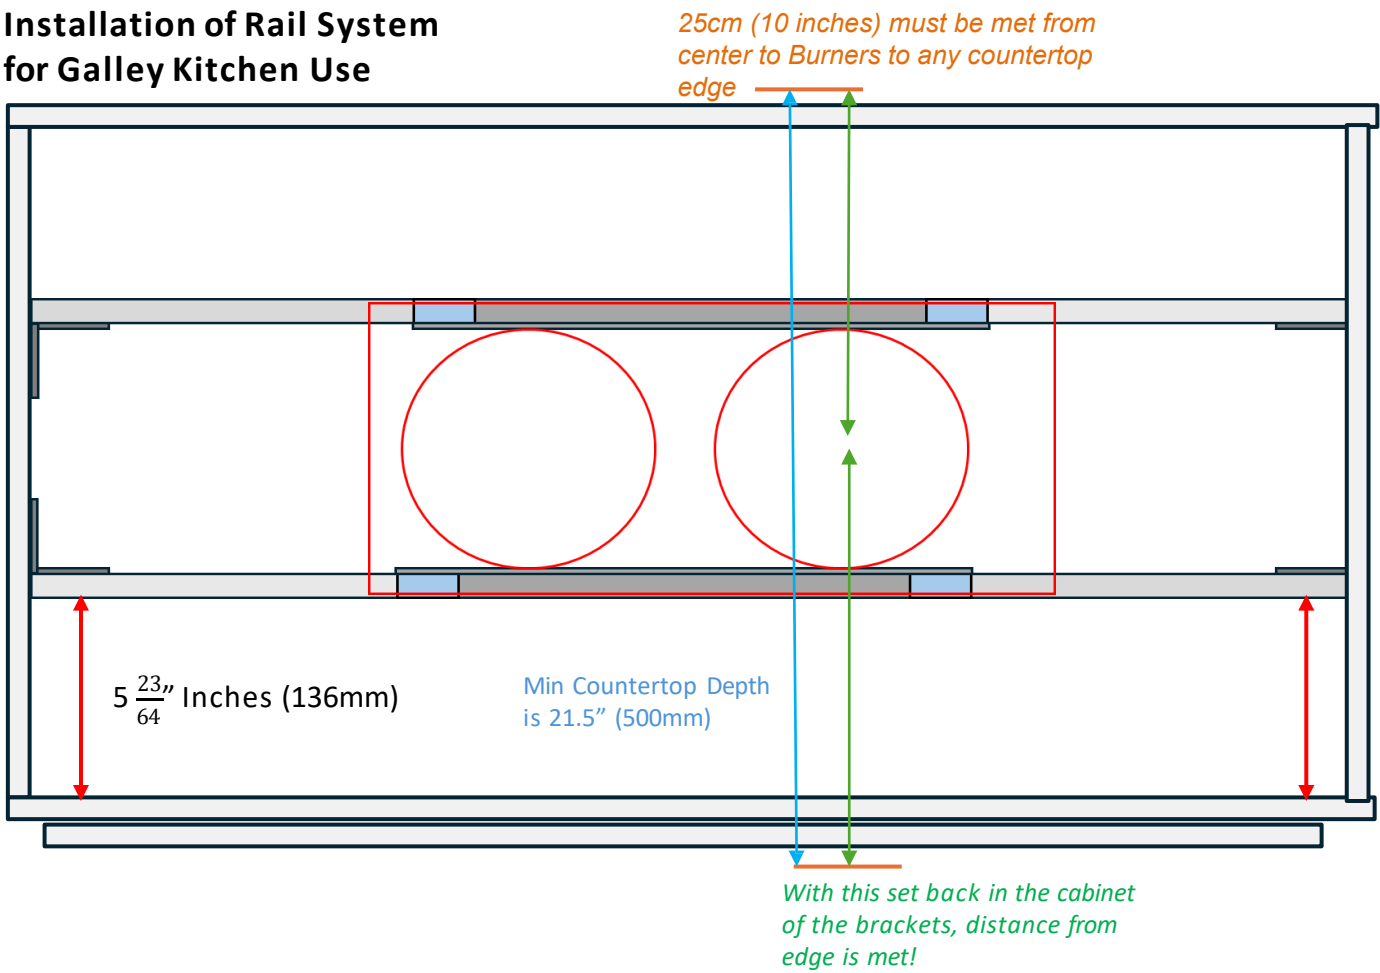




1 Burner 110V or 220V

8113-256-001B



**1 Burner Framed in Installation
of Rail System for Galley Kitchen**

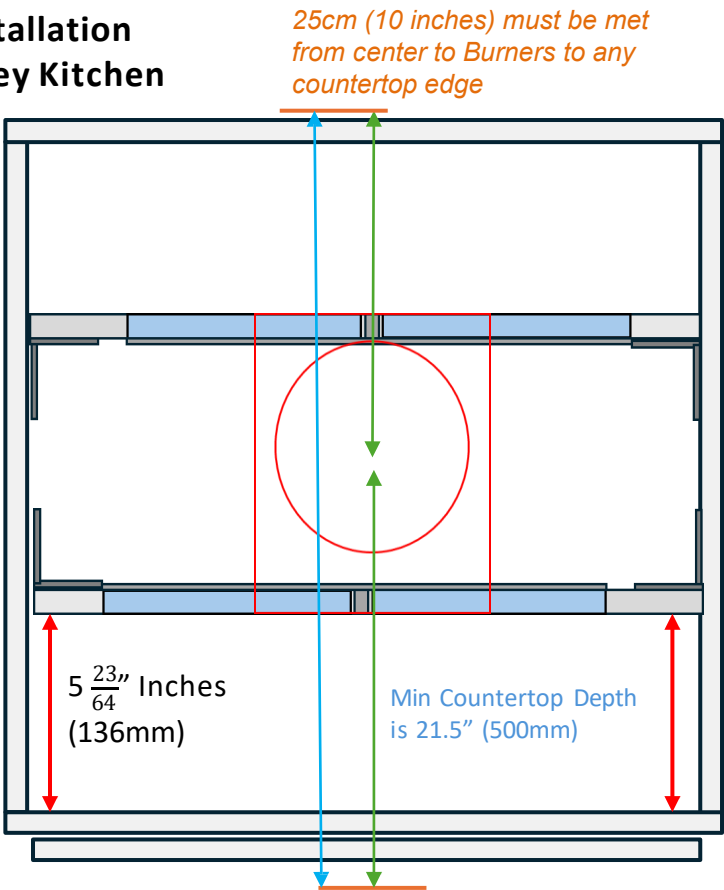

1 & 2 Burner Framed in Installation for Rail in Cabinets smaller then 22" much be installed Vertical

Countertop back side edge
must meet the 25cm from
center of burner

Countertop back side edge
must meet the 25cm from
center of burner

